


NOTE: PIPE PROJECTIONS ARE SHOWN FOR REFERENCE ONLY
CUSTOMER TO SUPPLY PIPING

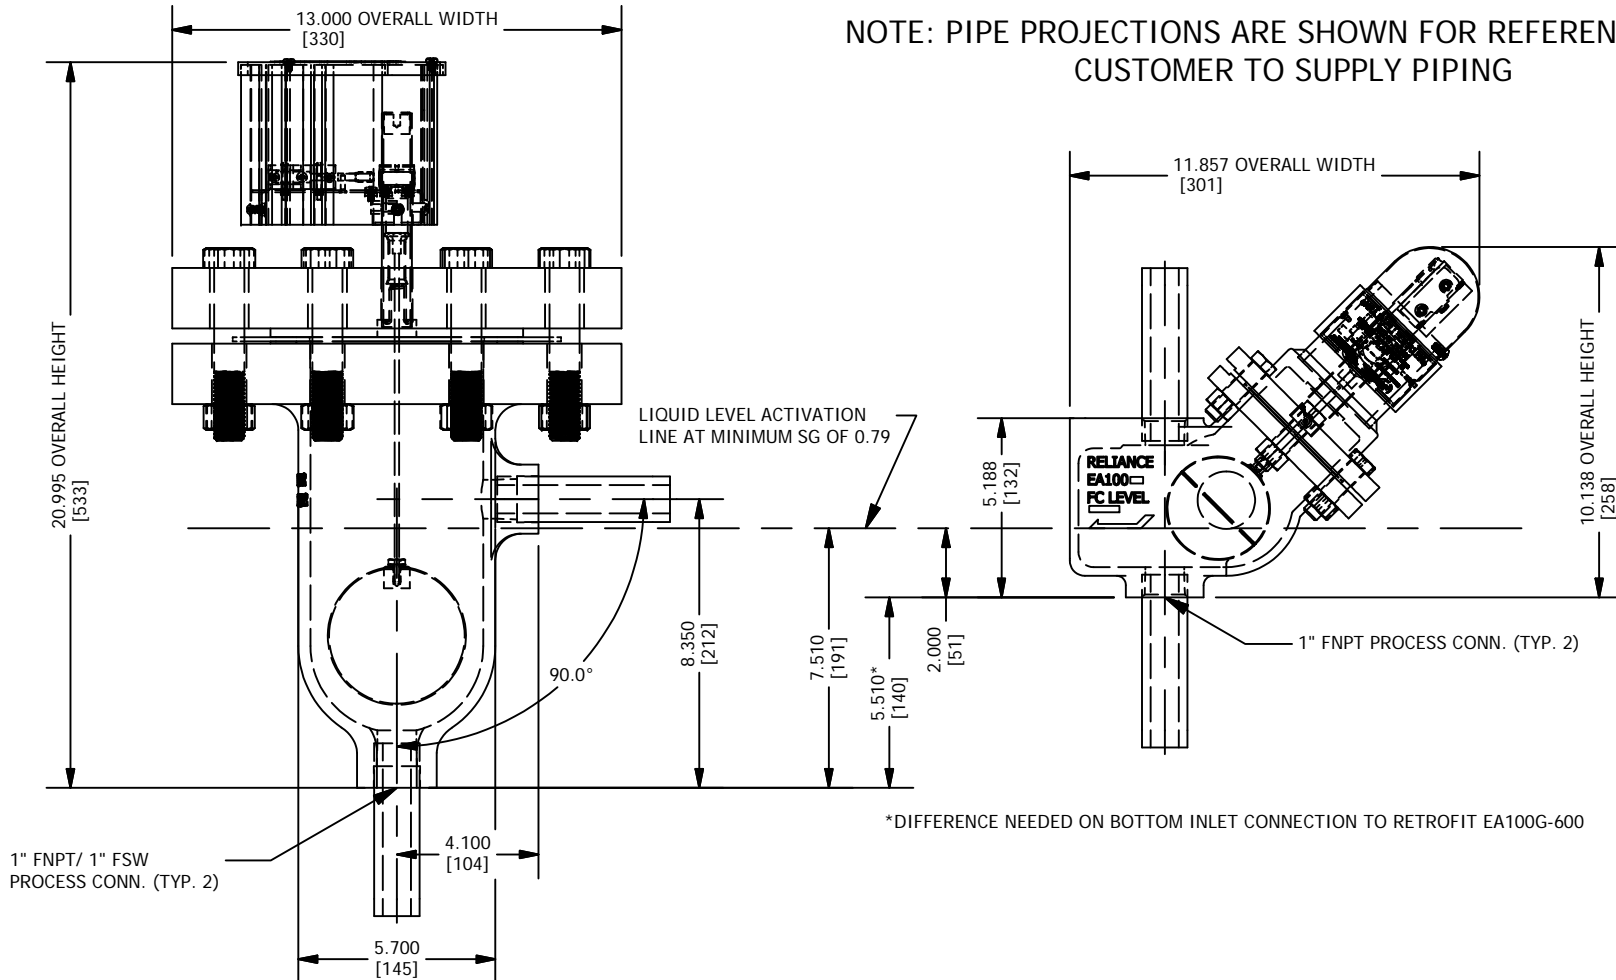

MODEL NUMBER EA100G-600

NOTES:

1. MICRO SWITCH APPROVED FOR THE FOLLOWING RATINGS:
5A-125, 250, OR 480 VAC
1/2A - 125 VDC
1/4A - 250 VDC
2. UNITS IN INCHES W/ MM EQUIVALENTS IN BRACKETS
3. MINIMUM SG. = .799
4. MAWP PER B16.5 GROUP 1.1 600 CLASS FLANGE
5. DESIGN PRESSURE: 1000 PSI MAWP
6. HYDROTEST PRESSURE: 1500 PSI

MODEL NUMBER EA100S

NOTES:

1. MICRO SWITCH, TYPE BZ-2RW82444-A2
UL APPROVED FOR THE FOLLOWING RATINGS:
5A-125, 250, OR 480 VAC
.50A-125 VDC
.25A-250 VDC
2. UNITS IN INCHES W/ MM EQUIVALENTS IN BRACKETS
3. STATIONARY SERVICE RATING:
MAX PRESSURE: 800 PSI @ 520°F
4. HYDROTEST: 1200 PSI

ALL DIMENSIONS IN INCHES [MM]

0			
REV	DATE	REVISION	BY

MANUFACTURED BY
Clark-Reliance®
16633 FOLTZ PARKWAY
STRONGSVILLE, OH 44149 USA
(440) 572-1500 | www.clarkreliance.com
© Clark-Reliance® Corporation. All Rights Reserved.

RELIANCE®

EA100G-600 VS EA100S PIPING CHANGE DIAGRAM

PART NUMBER: EA1366		DRAWING NO.:	REV.:
TOLERANCE CLASS (PER PES-004): D			
MATERIAL: SEE ORIGINAL DRAWINGS			
REVISION: 0			
DRAWN: NK	DRAWING NO.:		REV.:
CHECKED: SRM	EA1366		0
DATE: 8/18/2017			